


VOLKTEK


FPM-107

100FX SFP

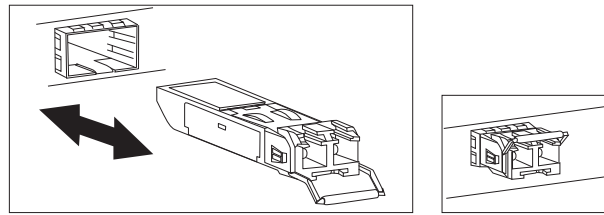

特長

- RoHS 指令に準拠
- ファストイーサネット規格対応
- 業界標準の SFP (スモールフォームプラグガブル) パッケージ採用
- デュプレックス LC コネクター搭載
- 差動 LVPECL 入出力対応
- 単一電源 3.3V で動作
- TTL 信号検出インジケータ搭載
- ホットプラグ対応
- EN 60825-1 準拠のクラス 1 レーザ製品

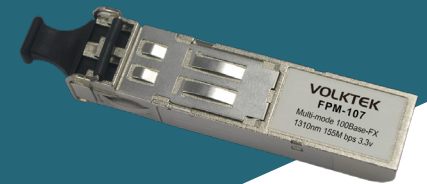

RoHS CE FCC




仕様

Model Name		Distance		Wavelength	TX Power	RX Sens	Voltage	Connector Type	Operating Temp
Wide Temperature	FPM-107	Multi-mode	2km	1310nm	-14dBm ~ -20dBm	< -31dBm	3.3V	Duplex LC	0°C~70°C / 32°F~158°F
	FPM-107I								-40°C~85°C / -40°F~185°F
Wide Temperature	FPM-107-30	Single-mode	30Km	1310nm	-8dBm ~ -15dBm	< -34dBm	3.3V	Duplex LC	0°C~70°C / 32°F~158°F
	FPM-107I-30								-40°C~85°C / -40°F~185°F
Wide Temperature	FPM-107-60	Single-mode	60Km	1310nm	0dBm ~ -5dBm	< -35dBm	3.3V	Duplex LC	0°C~70°C / 32°F~158°F
	FPM-107I-60								-40°C~85°C / -40°F~185°F
Wide Temperature	FPM-107-100	Single-mode	100Km	1550nm	0dBm ~ -5dBm	< -35dBm	3.3V	Duplex LC	0°C~70°C / 32°F~158°F
	FPM-107I-100								-40°C~85°C / -40°F~185°F

Ordering Information

FPM-107	100BASE-FX, Multi-mode SFP, 2Km, 0°C~70°C / 32°F~158°F
FPM-107I	100BASE-FX, Multi-mode SFP, 2Km, with wide temperature -40°C~85°C / -40°F~185°F
FPM-107-30	100BASE-FX, Single-mode SFP, 30Km, 0°C~70°C / 32°F~158°F
FPM-107I-30	100BASE-FX, Single-mode SFP, 30Km, with wide temperature -40°C~85°C / -40°F~185°F
FPM-107-60	100BASE-FX, Single-mode SFP, 60Km, 0°C~70°C / 32°F~158°F
FPM-107I-60	100BASE-FX, Single-mode SFP, 60Km, with wide temperature -40°C~85°C / -40°F~185°F
FPM-107-100	100BASE-FX, Single-mode SFP, 100Km, 0°C~70°C / 32°F~158°F
FPM-107I-100	100BASE-FX, Single-mode SFP, 100Km, with wide temperature -40°C~85°C / -40°F~185°F

外形図

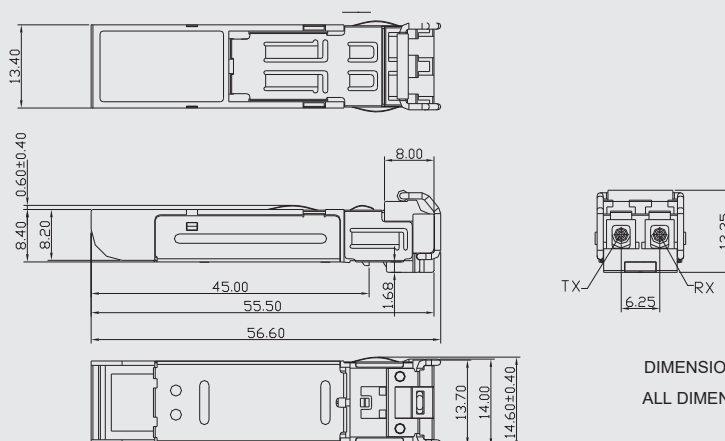

DIMENSIONS ARE IN MILLIMETERS

ALL DIMENSIONS ARE ±0.2mm UNLESS OTHERWISE SPECIFIED

Unit: mm