


GBM-123TS GBM-123RS

GbE 1.25G SFP

Features

- Compliant with IEEE802.3z Gigabit Ethernet Standard
- Compliant with Fiber Channel 100-SM-LC-L standard
- Industry standard small form pluggable (SFP) package
- Simplex LC connector
- Differential LVPECL inputs and outputs
- Single power supply 3.3V
- TTL signal detect indicator
- Hot Pluggable
- Class 1 laser product complies with EN 60825-1

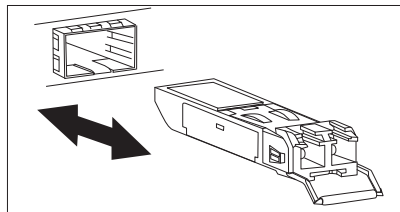

GBM-123TS

GBM-123RS

RoHS CE FCC



Specifications

	Model Name	Distance	Wavelength	TX Power	RX Sens	Voltage	Connector Type	Operating Temp
Wide Temperature	GBM-123TS	10Km	TX:1310/RX:1550	-3dBm ~ -9dBm	< -21dBm	3.3V	Simplex LC	0°C~70°C / -32°F~158°F
	GBM-123ITS							-40°C~85°C / -40°F~185°F
Wide Temperature	GBM-123RS	10Km	TX:1550/RX:1310	-3dBm ~ -9dBm	< -21dBm	3.3V	Simplex LC	0°C~70°C / -32°F~158°F
	GBM-123IRS							-40°C~85°C / -40°F~185°F

Ordering Information

GBM-123TS	1000Base-LX, Bi-Di SFP TX:1310/RX:1550 Single Mode, 10Km, 0°C~70°C / -32°F~158°F
GBM-123ITS	1000Base-LX, Bi-Di SFP TX:1310/RX:1550 Single Mode, 10Km, with wide temperature -40°C~85°C / -40°F~185°F
GBM-123RS	1000Base-LX, Bi-Di SFP TX:1550/RX:1310 Single Mode, 10Km, 0°C~70°C / -32°F~158°F
GBM-123IRS	1000Base-LX, Bi-Di SFP TX:1550/RX:1310 Single Mode, 10Km, with wide temperature -40°C~85°C / -40°F~185°F

Dimension

