

GBM-132, GBM-133, GBM-134

100FX SFP



特長

- RoHS 準拠
- SONET/SDH 規格準拠
- ファストイーサネット規格準拠
- IEEE802.3ah 100Base-BX 規格準拠
- ITU-T G.985 クラス S 対応
- 業界標準 SFP (Small Form Pluggable) パッケージ採用
- シンプレックス LC コネクタ搭載
- 差動 LVPECL 入出力対応
- 単一 3.3V 電源で動作
- TTL 信号検出インジケータ搭載
- ホットプラグ対応
- EN 60825-1 に準拠したクラス 1 レーザ安全規格対応


仕様

GBM-132TS
GBM-133TS
GBM-134TS

GBM-132RS
GBM-133RS
GBM-134RS

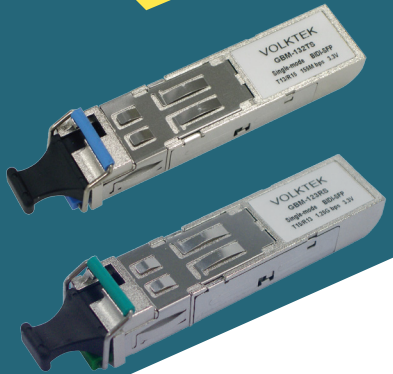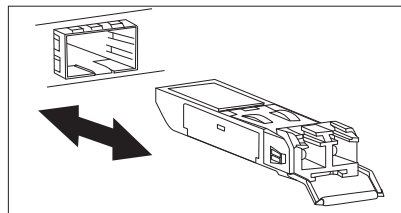

RoHS CE FCC




	Model Name	Distance	Wavelength	TX Power	RX Sens	Voltage	Connector Type	Operating Temp
Wide Temperature	GBM-132TS	20Km	TX:1310/RX:1550	-8dBm ~ -14dBm	< -32dBm	3.3V	Simplex LC	0°C~70°C / -32°F~158°F
	GBM-132ITS							-40°C~85°C / -40°F~185°F
Wide Temperature	GBM-132RS	20Km	TX:1550/RX:1310	-8dBm ~ -14dBm	< -32dBm	3.3V	Simplex LC	0°C~70°C / -32°F~158°F
	GBM-132IRS							-40°C~85°C / -40°F~185°F
Wide Temperature	GBM-133TS	40Km	TX:1310/RX:1550	0dBm ~ -8dBm	< -34dBm	3.3V	Simplex LC	0°C~70°C / -32°F~158°F
	GBM-133ITS							-40°C~85°C / -40°F~185°F
Wide Temperature	GBM-133RS	40Km	TX:1550/RX:1310	0dBm ~ -8dBm	< -34dBm	3.3V	Simplex LC	0°C~70°C / -32°F~158°F
	GBM-133IRS							-40°C~85°C / -40°F~185°F
Wide Temperature	GBM-134TS	60Km	TX:1310/RX:1550	0dBm ~ -5dBm	< -34dBm	3.3V	Simplex LC	0°C~70°C / -32°F~158°F
	GBM-134ITS							-40°C~85°C / -40°F~185°F
Wide Temperature	GBM-134RS	60Km	TX:1550/RX:1310	0dBm ~ -5dBm	< -34dBm	3.3V	Simplex LC	0°C~70°C / -32°F~158°F
	GBM-134IRS							-40°C~85°C / -40°F~185°F

Ordering Information


GBM-132TS	100Base-FX, Bi-Di SFP TX:1310/RX:1550 Single Mode, 20Km, 0°C~70°C / -32°F~158°F
GBM-132ITS	100Base-FX, Bi-Di SFP TX:1310/RX:1550 Single Mode, 20Km, with wide temperature -40°C~85°C / -40°F~185°F
GBM-132RS	100Base-FX, Bi-Di SFP TX:1550/RX:1310 Single Mode, 20Km, 0°C~70°C / -32°F~158°F
GBM-132IRS	100Base-FX, Bi-Di SFP TX:1550/RX:1310 Single Mode, 20Km, with wide temperature -40°C~85°C / -40°F~185°F
GBM-133TS	100Base-FX, Bi-Di SFP TX:1310/RX:1550 Single Mode, 40Km, 0°C~70°C / -32°F~158°F
GBM-133ITS	100Base-FX, Bi-Di SFP TX:1310/RX:1550 Single Mode, 40Km, with wide temperature -40°C~85°C / -40°F~185°F
GBM-133RS	100Base-FX, Bi-Di SFP TX:1550/RX:1310 Single Mode, 40Km, 0°C~70°C / -32°F~158°F
GBM-133IRS	100Base-FX, Bi-Di SFP TX:1550/RX:1310 Single Mode, 40Km, with wide temperature -40°C~85°C / -40°F~185°F
GBM-134TS	100Base-FX, Bi-Di SFP TX:1310/RX:1550 Single Mode, 60Km, 0°C~70°C / -32°F~158°F
GBM-134ITS	100Base-FX, Bi-Di SFP TX:1310/RX:1550 Single Mode, 60Km, with wide temperature -40°C~85°C / -40°F~185°F
GBM-134RS	100Base-FX, Bi-Di SFP TX:1550/RX:1310 Single Mode, 60Km, 0°C~70°C / -32°F~158°F
GBM-134IRS	100Base-FX, Bi-Di SFP TX:1550/RX:1310 Single Mode, 60Km, with wide temperature -40°C~85°C / -40°F~185°F

外形図

GBM-132TS / GBM-132ITS
GBM-133TS / GBM-133ITS
GBM-134TS / GBM-134ITS

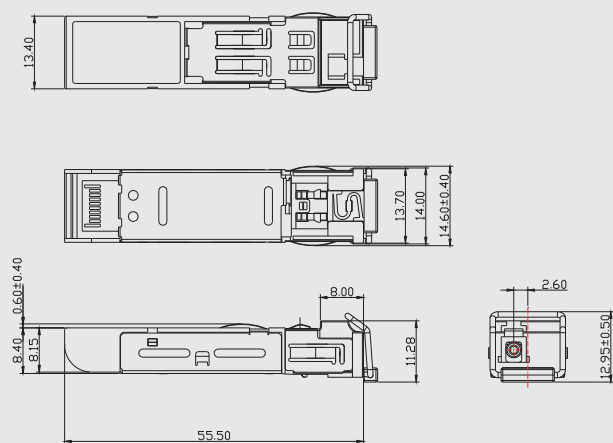

GBM-132RS / GBM-132IRS
GBM-133RS / GBM-133IRS
GBM-134RS / GBM-134IRS

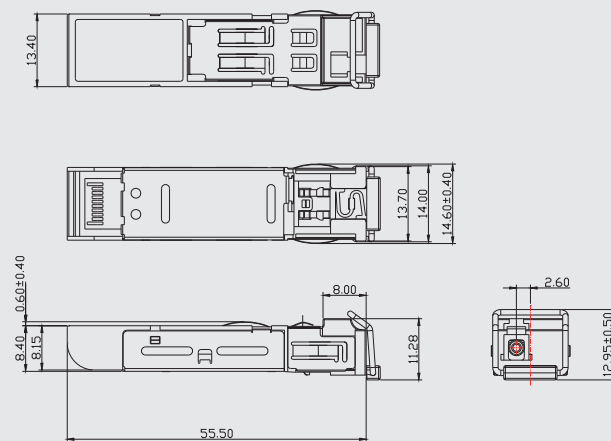

DIMENSIONS ARE IN MILLIMETERS

ALL DIMENSIONS ARE ± 0.2 mm UNLESS OTHERWISE SPECIFIED